


Optic Fiber Ducting Breakout Kits

These new duct breakout kits provide the ideal solution for a high capacity fiber cord outlet need. This solution provides a safe and effective means of protecting optic fiber cords and allows for easy routing of cords down into a telecoms frame. Duct outlets can be placed anywhere along the duct and minimal time and effort is required to install these outlet components.


TC1279-452A 100mm x 100mm (4" x 4") 90deg Down Break Out

- ▶▶ Provides a 90 degree, down bend, (and break-out facility), at any point in a 100mm, 220mm or 300mm duct system
- ▶▶ ROHS compliant material, fire retardant plastic, Halogen free, UL94-VO rated
- ▶▶ Comes with:
TC1279-452 (90deg down body)
TC1279-453 (90deg down Lid)

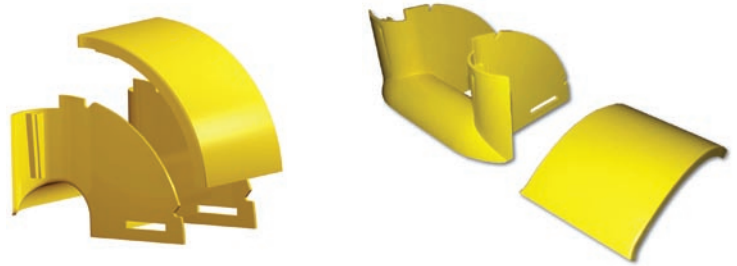


TC1279-452KIT 100mm x 100mm (4" x 4") 90deg Down Break Out Kit

- ▶▶ Provides a 90 degree, down bend, tube in a 100mm, 220mm or 300mm duct system
- ▶▶ The 75mm ID/88 mm OD tube can carry either: 360 x 2mm cords; 210 x 2.4 mm cords; or 160 x 3mm dia cords maximum
- ▶▶ ROHS compliant material, fire retardant plastic, Halogen free, UL94-VO rated
- ▶▶ Comes with:
1 x TC1279-452A
1 x 570mm long Convolutated tube
1 x TC1279-456 Convolutated tube outlet

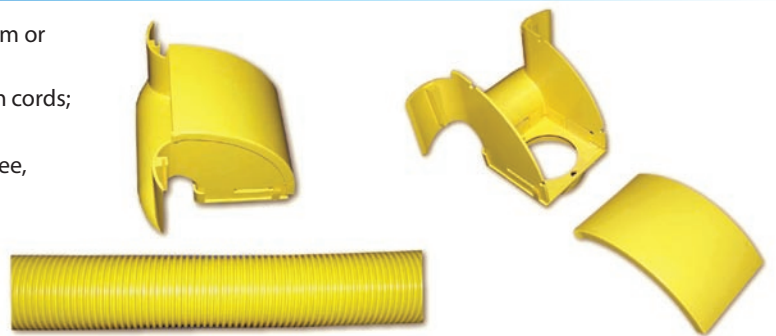


TC1279-454A 220mm x 100mm (8" x 4") 90 Deg Down Break Out

- ▶▶ Provides a 90 degree, down bend, (and break-out facility), at any point, in a 100mm, 220mm or 300mm duct system
- ▶▶ Can accept any standard 220 x 100mm duct item using a joiner
- ▶▶ ROHS compliant material, fire retardant plastic, Halogen free, UL94-VO rated
- ▶▶ Comes with:
TC1279-454 (90deg down body)
TC1279-455 (90deg down Lid)

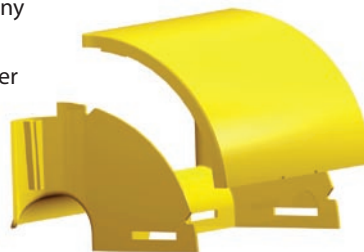

TC1279-454KIT 220mm x 100mm (8" x 4") 90 Deg Down Break Out Kit

- ▶▶ Provides a 90 degree, down bend, for two large size convoluted tubes, in a 100mm, 220mm or 300mm duct system
- ▶▶ Each 75mm ID tube can carry either: 360 x 2mm cords; 210 x 2.4 mm cords; or 160 x 3mm dia cords, maximum.
- ▶▶ ROHS compliant material, fire retardant plastic, Halogen free, UL94-VO rated
- ▶▶ Comes with:
1 x TC1279-454A
2 x 570mm long Convolutated tubes
1 x TC1279-457 Dual Convolutated tube outlet

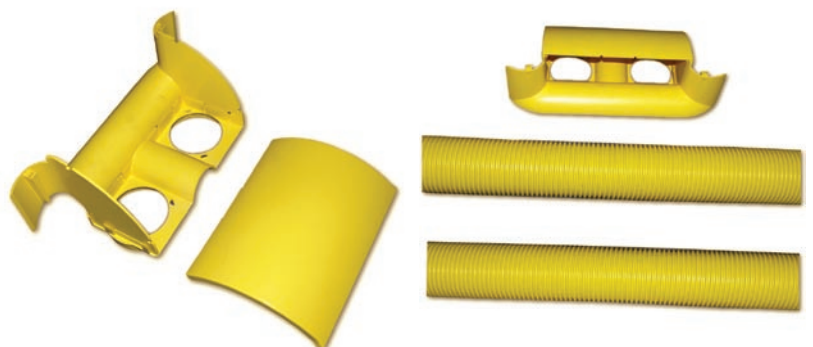

Outlet Adaptors

TC1279-456
Outlet, 100mm x 100mm duct to single 88mm tube



TC1279-457
Outlet, 220mm x 100mm duct to dual 88mm tube



Convuluted Tube

TC1279-479 88mm OD, 75mm ID convuluted tube, 1150mm long
 TC1279-480 75mm OD, 60mm ID convuluted tube, 1150mm long
 TC1279-480A 75mm OD, 60mm ID convuluted tube, 1150mm long
 (with 2 x 75mm long by 88mm dia. adaptor tube)



New High Capacity Duct Outlet Solution

- ▶▶ Easy to install
- ▶▶ High Capacity outlet solution
- ▶▶ ROHS Compliant Material, fire retardant plastic, Halogen free, UL94-VO rated
- ▶▶ Can be fitted to existing or new installations
- ▶▶ Expert Technical and Engineering support available
- ▶▶ Large range of stock and fast delivery

